




TEK20XDC/TEK20XDCP

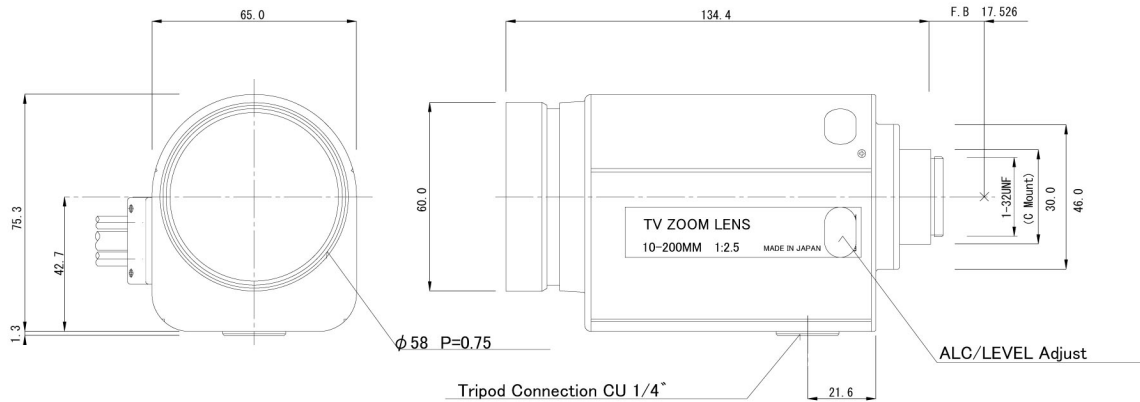

Unit:mm

SPECIFICATION					
FORMAT		1/2"			
MOUNT		C MOUNT			
FOCAL LENGTH		10 - 200 mm			
IRIS RANGE		F2.5 - 360			
ANGLE OF VIEW	(1/2")	43.6 (D) x 35.5 (H) x 27.0 (V) ^o (WIDE)			
		2.3 (D) x 1.8 (H) x 1.4 (V) ^o (TELE)			
	(1/3")	33.6 (D) x 27.0 (H) x 20.7 (V) ^o (WIDE)			
		1.7 (D) x 1.4 (H) x 1.0 (V) ^o (TELE)			
M.O.D.		2.5 M			
BACK FOCAL LENGTH		24.44 mm			
FLANGE BACK LENGTH		17.526 mm			
FILTER SCREW SIZE		M58 P = 0.75			
DIMENSIONS		65.0 (W) x 75.3 (H) x 134.9 (L) mm			
WEIGHT		Approx.600 g (G) / 620 g (GP)			
OPERATION	< IRIS > AUTO (DC)	DRIVING COIL : 190Ω ± 10% (20°C)			
		CLOSE-OPEN less than 4.0V			
		OPEN-CLOSE more than 0.5V			
		DUMPING COIL : 1150Ω ± 10% (20°C)			
		RESPOND SPEED : 3.0sec. or less			
	<ZOOM> MOTORIZED	CONTROL VOLTAGE : DC6 -12V, MAX.40mA (6V)			
		MOTORIZATION SPEED : APPROX. 11.0sec. (6V)			
	<FOCUS> MOTORIZED	CONTROL VOLTAGE : DC6 -12V, MAX.40mA (6V)			
		MOTORIZATION SPEED : APPROX. 12.5sec. (6V)			
OPERATING TEMPERATURE		-10 - +50°C			
[CABLE CONNECTION]					
< 4 CORE CABLE FOR AUTO-IRIS >					
WHITE	DRIVE (+)	OPEN			
GREEN	DRIVE (-)				
BLACK	DAMP (+)	OPEN			
RED	DAMP (-)				
< 8 CORE CABLE FOR ZOOM AND FOCUS > PRESET FOR ZOOM AND FOCUS (GP-TYPE)					
YELLOW	ZOOM (+)	TELE	PURPLE	POT SUPPLY	POWER (+)
RED	ZOOM		GRAY	ZOOM OUT	MAX. at TELE
GREEN	FOCUS (+)	NEAR	BLUE	FOCUS OUT	MAX. at NEAR
BLACK	FOCUS		ORANGE	POT RETURN	POWER (-)

Specifications are subject to change without notice.

TEKSTAR Optical Inc.

270 KOHR RD
 KINGS PARK, NY 11754-1237
Toll Free: 888-LENS-GUY (888-536-7489)
Phone: 631-663-3558
Toll Free Fax: 1-888-CCTVFX1
Fax: 631-269-5368
E-mail: info@tekstaroptical.com
 www.tekstaroptical.com