




## TEK212V

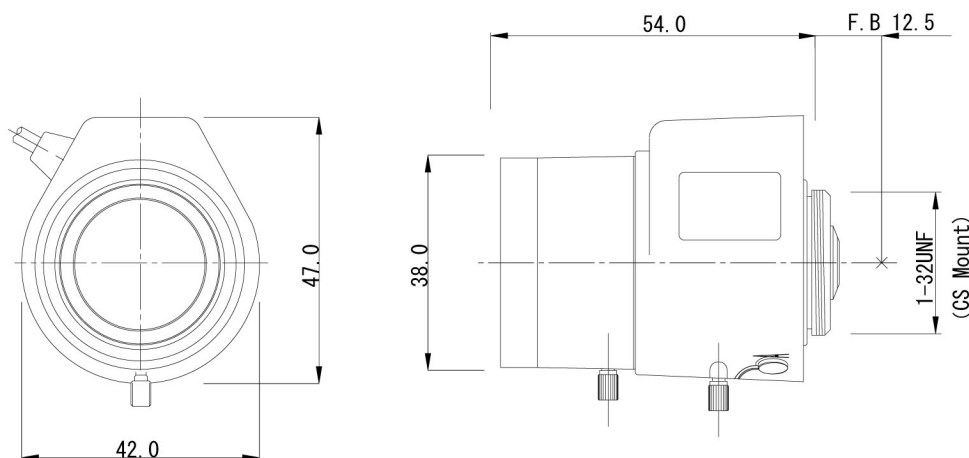

SPECIFICATION		
FORMAT	1/3"	
MOUNT	CS MOUNT	
FOCAL LENGTH	2.8-12mm	
IRIS RANGE	F1.4 - 360	
ANGLE OF VIEW	(1/3") 115.2 (D) x 92.2 (H) x 69.1 (V)° ( WIDE ) 28.5 (D) x 22.8 (H) x 17.2 (V)° ( TELE )	
M.O.D.	0.3 M	
BACK FOCAL LENGTH	6.72mm	
FLANGE BACK LENGTH	12.5 mm	
DIMENSIONS	38.0 (W) x 47.0 (H) x 54.0 (L) mm	
WEIGHT	Approx. 63 g	
OPERATION	<IRIS> AUTO (VIDEO) INPUT VOLTAGE : DC8 - 16V, MAX. 30 mA INPUT SIGNAL : VIDEO SIGNAL ( V or VS ) INPUT IMPEDANCE : HIGH IMPEDANCE SENSITIVITY ADJUSTMENT : 0.5 - 1.0 V <sub>p-p</sub> RESPOND SPEED : 3.0sec. or less	
	<FOCUS> MANUAL WITH LOCK SCREW	
	<ZOOM> MANUAL WITH LOCK SCREW	
OPERATING TEMPERATURE	-10 - +50°C	
[ CABLE CONNECTION ]		
< 4 CORE CABLE FOR AUTO-IRIS >		
WHITE	VIDEO SIGNAL	0.5 - 1.0V <sub>p-p</sub>
RED	POWER (+)	DC8 - 16V
BLACK	POWER (-)	GND
GREEN	NC	

Specifications are subject to change without notice.

**TEKSTAR Optical Inc.**

270 KOHR RD  
KINGS PARK, NY 11754-1237  
Toll Free: 888-LENS-GUY (888-536-7489)  
Phone: 631-663-3558  
Toll Free Fax: 1-888-CCTVFX1  
Fax: 631-269-5368  
E-mail: info@tekstaroptical.com  
www.tekstaroptical.com