




TEK212DC

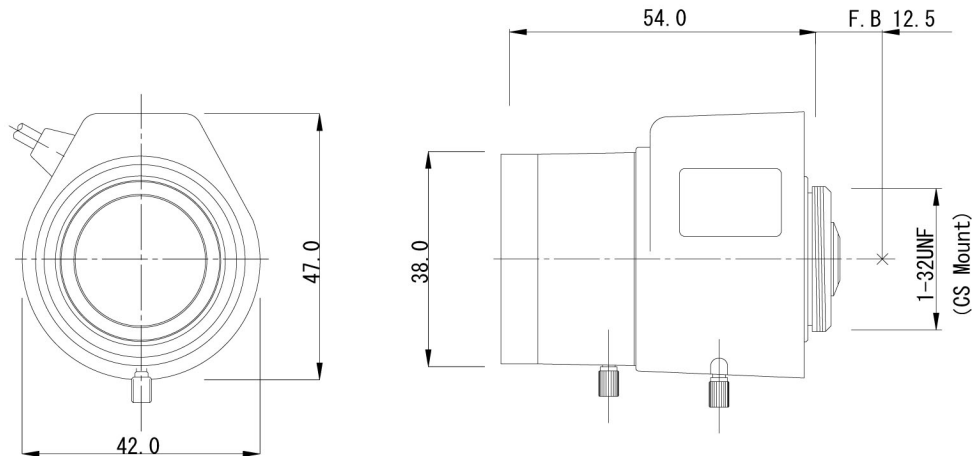

| SPECIFICATION | | |
|-----------------------|------------------|---|
| FORMAT | | 1/3" |
| MOUNT | | CS MOUNT |
| FOCAL LENGTH | | 2.8-12mm |
| IRIS RANGE | | F1.4 - 360 |
| ANGLE OF VIEW | (1/3") | 115.2 (D) x 92.2 (H) x 69.1 (V)° (WIDE) 28.5 (D) x 22.8 (H) x 17.2 (V)° (TELE) |
| M.O.D. | | 0.3 M |
| BACK FOCAL LENGTH | | 6.72mm |
| FLANGE BACK LENGTH | | 12.5 mm |
| DIMENSIONS | | 38.0 (W) x 47.0 (H) x 54.0 (L) mm |
| WEIGHT | | Approx. 61 g |
| OPERATION | <IRIS> AUTO (DC) | DRIVING COIL : 190 Ω ± 10% (20°C) |
| | | CLOSE-OPEN less than 4.0V |
| | | OPEN-CLOSE more than 0.5V |
| | | DUMPING COIL : 1150 Ω ± 10% (20°C) |
| | | RESPOND SPEED : 3.0sec. or less |
| | <FOCUS> MANUAL | WITH LOCK SCREW |
| | <ZOOM> MANUAL | WITH LOCK SCREW |
| OPERATING TEMPERATURE | | -10 - +50°C |

Specifications are subject to change without notice.

TEKSTAR Optical Inc.

270 KOHR RD
KINGS PARK, NY 11754-1237
Toll Free: 888-LENS-GUY (888-536-7489)
Phone: 631-663-3558
Toll Free Fax: 1-888-CCTVFX1
Fax: 631-269-5368
E-mail: info@tekstaroptical.com
www.tekstaroptical.com